

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Deko-Light

**Supplier's address:** Product Management, Deko-Light Elektronik Vertriebs GmbH, Auf der Hub 2, D-76307 Karlsbad, DE

**Model identifier:** 565364

## Type of light source:

|                                                     |                  |                                 |                            |
|-----------------------------------------------------|------------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED              | Non-directional or directional: | DLS                        |
| Light source cap-type (or other electric interface) | other electrical |                                 |                            |
| Mains or non-mains:                                 | MLS              | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No               | Envelope:                       | -                          |
| High luminance light source:                        | No               |                                 |                            |
| Anti-glare shield:                                  | No               | Dimmable:                       | Only with specific dimmers |


## Product parameters

| Parameter                                                                                                                                             | Value                     | Parameter                                                                                                                                                  | Value                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>General product parameters:</b>                                                                                                                    |                           |                                                                                                                                                            |                         |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 14                        | Energy efficiency class                                                                                                                                    | F                       |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 171 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 or 4 000 or 6 000 |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 14,0                      | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                    |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                         | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                      |
| Outer dimensions without separate con-                                                                                                                | Height                    | Spectral power distribution in the                                                                                                                         | See image in last page  |
|                                                                                                                                                       | Width                     |                                                                                                                                                            |                         |
|                                                                                                                                                       | Depth                     |                                                                                                                                                            |                         |


|                                                                                                                         |       |  |                                                                    |                |
|-------------------------------------------------------------------------------------------------------------------------|-------|--|--------------------------------------------------------------------|----------------|
| trol gear, lighting control parts and non-lighting control parts, if any (millimetre)                                   |       |  | range 250 nm to 800 nm, at full-load                               |                |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -     |  | If yes, equivalent power (W)                                       | -              |
|                                                                                                                         |       |  | Chromaticity coordinates (x and y)                                 | 0,313<br>0,337 |
| <b>Parameters for directional light sources:</b>                                                                        |       |  |                                                                    |                |
| Peak luminous intensity (cd)                                                                                            | 505   |  | Beam angle in degrees, or the range of beam angles that can be set | 97             |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |       |  |                                                                    |                |
| R9 colour rendering index value                                                                                         | 27    |  | Survival factor                                                    | 0,90           |
| the lumen maintenance factor                                                                                            | 0,70  |  |                                                                    |                |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |       |  |                                                                    |                |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90  |  | Colour consistency in McAdam ellipses                              | 6              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | ..(b) |  | If yes then replacement claim (W)                                  | -              |
| Flicker metric (Pst LM)                                                                                                 | 0,4   |  | Stroboscopic effect metric (SVM)                                   | 0,1            |

(a) : not applicable;

(b) : not applicable;

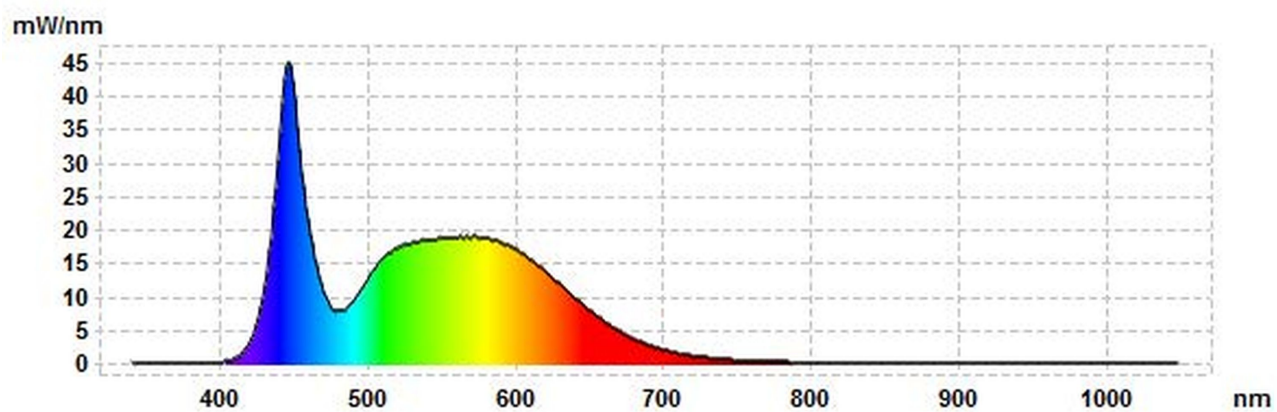

Model placed on the Union market from 18/11/2022



**EPREL registration number:** 1256081

<https://eprel.ec.europa.eu/qr/1256081>

**Supplier:** Deko-Light Elektronik-Vertriebs GmbH (Manufacturer)

**Website:** <https://deko-light.com/>

**Customer care service:**

**Name:** Product Management, Deko-Light Elektronik Vertriebs GmbH

**Website:** <https://deko-light.com/>

**Email:** [pm@deko-light.com](mailto:pm@deko-light.com)

**Phone:** +4972489271724

**Address:**

Auf der Hub 2  
D-76307 Karlsbad  
Germany